

Screw

- 3, 4, 6, 10, 16, 24, 32, 48 Contacts
- Current: 10A, 16A
- Temperature resistance up to 200°C

G High temperature resistance series



High temperature resistance!!!

Preform molds, precision extrusion molds, hot runners,
ideal high-temperature resistant heavy-duty connectors!

New

Application

Preform molds, precision extrusion molds, hot runners,
ideal high-temperature resistant heavy-duty connectors

high-temperature resistant heavy-duty connectors



There are upgraded products now!

HLA3

3 +



- Code A3P-G
- Product Description Male

- Code A3S-G
- Product Description Female

- Code A3TEL-G
- Product Description Hood

- Code A3OSL-G
- Product Description Housing

- Code A3BSL-G
- Product Description Housing

HLE10

10+



- Code E10P-G
- Product Description Male



- Code E10S-G
- Product Description Female

- Code E10TE-G
- Product Description Hood

- Code E10BH-G
- Product Description Housing

HLE16

16+

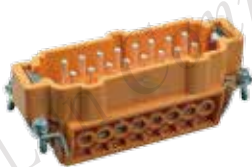

- Code E16P-G
- Product Description Male

- Code E16S-G
- Product Description Female

- Code E16TE-G
- Product Description Hood

- Code E16BH-G
- Product Description Housing

G



TUV SUD



ISO9001

ISO14001

ISO45001



华伦连接器
HuaLun Connector

HLE24

24+



- Code E24P-G
- Product Description Male

- Code E24S-G
- Product Description Female

- Code E24TE-G
- Product Description Hood

- Code E24BH-G
- Product Description Housing

HLE32

32+



- Code E32P-G
- Product Description Male


- Code E32S-G
- Product Description Female

- Code E32TE-G
- Product Description Hood

- Code E32BH-G
- Product Description Housing

HLE48

48+

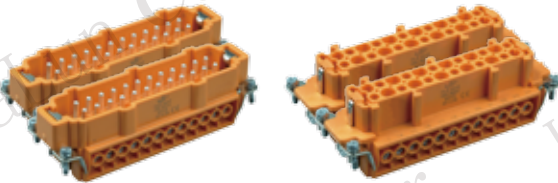

- Code E48P-G
- Product Description Male

- Code E48S-G
- Product Description Female

- Code E48TE-G
- Product Description Hood

- Code E48BH-G
- Product Description Housing



G